

Supplied & Supported By:

Carpenter's Jime Systems

P: 409.838.5391 | **TF**: 888.838.5391

CarpentersTimeSystems.com











Portable ink-jet technology for now and the future.

The innovative *HandJet EBS-250* combines the proven success of our *PicAS EBS-230* production line ink-jet system and adds a unique, wireless interface developed through intensive research.

It signals a new era in portable, hand-held ink-jet coding.

Weighing in at just over two pounds – including its on-board rechargeable battery and ink cartridge – the *HandJet EBS-250* is the ultimate in lightweight, compact coding.

And with its patented print technology, the unit improves and economizes ink management to virtually obsolete traditional manual coding methods like stencil marking, hand stamps and roll coders.

By using solvent-based inks in an array of colors, the *HandJet EBS-250* provides fast, clean printing on a variety of corrugated materials, in addition to metal, glass and plastic substrates. The unit's high-volume ink-jet cartridge efficiently provides up to 100,000 characters with a dot matrix of 7x5.

The hand-held system also minimizes energy consumption to print for up to 50 continuous hours thanks to its rechargeable Li-lon battery – and recharging takes only two and a half hours.

Easy formatting & wireless operation

The HandJet EBS-250 uses a simple Microsoft™ Windows®-based program to format and transmit messages that are easily created on a personal computer. Messages can consist of alphanumerics and logos from Windows® fonts and symbols, as well as diacritical characters.


Formats can include date, time and ascending or descending sequential numbers. Up to 15,000 characters can be stored in the unit's memory, including up to 10 message blocks with several lines in each.

Messages are instantly transmitted to the *HandJet EBS-250* by a radio frequency USB interface at a distance up to 150 feet. A single PC can control multiple units with one RF interface.



P: 409.838.5391 | TF: 888.838.5391



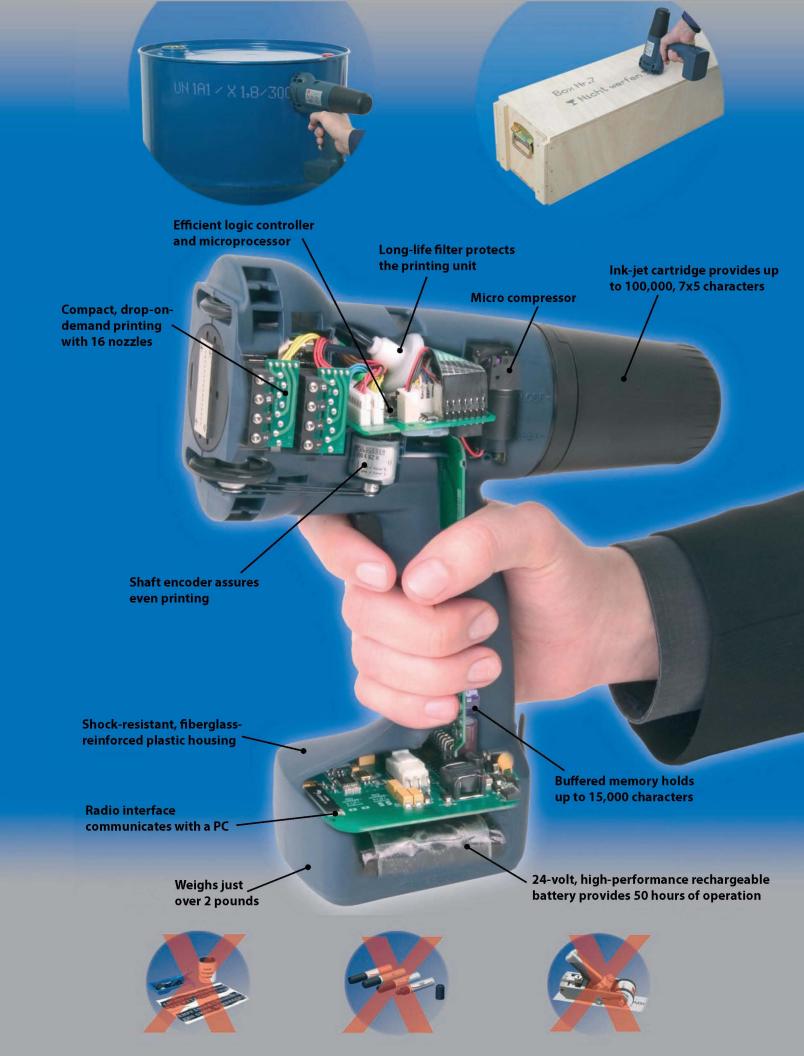

HandJet[®] EBS-250

Specifications

Nozzles: 16

Nozzle diameter: 150 µm

Minimum size of printed object: 1.38" (35mm)

Working position: Any angle

Printing: Enables printing of up to 10 texts in successive lines

Maximum characters per text: 1500 - includes control character for built-in

Text and print parameters: 1 to 10 - loaded into unit via PC

Graphics: Editing and printing of graphical text and symbols using

Windows® fonts (True Type) standard

Special characters: National (diacritical) characters and graphics

Variable fields: Date, time, ascending/descending sequential numbers,

universal counter

Programming:

Wireless radio frequency up to 150 feet (46m)

Text- and parameter-processing software; Windows* 98SE/ME/NT/2000/XP

· Network up to 20 units; radio-controlled from PC

Timing: Synchronized with rotational speed of the lower stabilizer, or at intervals by an internal generator

Power supply: Three (3) Li-Ion rechargeable batteries

Operating time: Up to 50 hours continuous operation with fully-charged

battery at 68°F (20°C); automatic low-battery indicator

Recharging: Automatically using external 24-volt, 1-amp DC power pack;

charging time less than 2.5 hours

Ink: Cartridges; ethanol-, acetone- or water-based in various colors

Cartridge capacity: 3.7 ounces (110ml); prints approx. 100,000, 7x5 dot-

matrix characters or 17,000, 16x10 dot-matrix characters

Working pressure: 4.4 to 5.8 psi (0.3 to 0.4 bar) via internal pump

Operating temp: 33°F to 104°F (0.5°C to 40°C)

Storage temp: 34°F to 113°F (1°C to 45°C) - water-based ink 14°F to 113°F (-10°C to 45°C) - ethanol- or acetone-based ink

Humidity: Up to 95% non-condensing; printer operates in rain on dry

Accessories





· CD w/utility software and user-Radio frequency module for wire USB Cable for radio frequency module Stabilizer wheels for use on curved



WO 99/48694; EP 1219439; EP 12194323

Protection of designs



Ink-Jet Systems Coding and Marking.com

Supplied & Supported By:

Carpenter's Time Systems "Since 1962"

P: 409.838.5391 | TF: 888.838.5391